

# HOSTAFORM® C 9021 GV3/30

Injection molding grade; reinforced with ca. 30 % glass spheres

Chemical abbreviation according to ISO 1043-1: POM Molding compound ISO 29988- POM-K, M-GNR, 02-002, GB30 POM copolymer Injection molding type, reinforced with ca. 30 % glass spheres; high resistance to thermal and oxidative degradation. UL-registration in natural and a thickness more than 0.81 mm, in black and a thickness more than 1.0 mm as UL94 HB, temperature index UL 746 B for a thickness of 1.57 mm, electrical 105 °C, mechanical 95 °C (tensile impact) and 100 °C (tensile). Burning rate ISO 3795 and FMVSS 302 < 100 mm/min for a thickness more than 1 mm. Ranges of applications: For low-warpage and dimensionally stable molded parts with higher rigidity and hardness. FMVSS = Federal Motor Vehicle Safety Standard (USA) UL = Underwriters Laboratories (USA)

## Product information

Part Marking Code	POM	ISO 11469
-------------------	-----	-----------

## Rheological properties

Melt volume-flow rate	7.5 cm <sup>3</sup> /10min	ISO 1133
Temperature	190 °C	
Load	2.16 kg	
Moulding shrinkage, parallel	1.7 %	ISO 294-4, 2577
Moulding shrinkage, normal	1.4 %	ISO 294-4, 2577

## Typical mechanical properties

Tensile Modulus	3900 MPa	ISO 527-1/-2
Yield stress, 50mm/min	38 MPa	ISO 527-1/-2
Yield strain, 50mm/min	6 %	ISO 527-1/-2
Nominal strain at break	12 %	ISO 527-1/-2
Flexural Modulus	3500 MPa	ISO 178
Compressive stress at 1% strain	30 MPa	ISO 604
Tensile creep modulus, 1h	3300 MPa	ISO 899-1
Tensile creep modulus, 1000h	2100 MPa	ISO 899-1
Charpy impact strength, 23 °C	40 kJ/m <sup>2</sup>	ISO 179/1eU
Charpy impact strength, -30 °C	40 kJ/m <sup>2</sup>	ISO 179/1eU
Charpy notched impact strength, 23 °C	3 kJ/m <sup>2</sup>	ISO 179/1eA
Charpy notched impact strength, -30 °C	3 kJ/m <sup>2</sup>	ISO 179/1eA
Ball indentation hardness, H 358/30	167 MPa	ISO 2039-1

## Thermal properties

Melting temperature, 10 °C/min	166 °C	ISO 11357-1/-3
Temp. of deflection under load, 1.8 MPa	112 °C	ISO 75-1/-2
Vicat softening temperature, 50 °C/h, 50N	151 °C	ISO 306
Coeff. of linear therm. expansion, parallel	90 E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal	90 E-6/K	ISO 11359-1/-2
Thermal conductivity of melt	0.225 W/(m K)	Internal
Eff. thermal diffusivity	7.3E-8 m <sup>2</sup> /s	Internal
Spec. heat capacity of melt	1780 J/(kg K)	Internal

# HOSTAFORM® C 9021 GV3/30

## Flammability

Burning Behav. at 1.5mm nom. thickn.	HB class	UL 94
Thickness tested	1.6 mm	UL 94
Burning Behav. at thickness h	HB class	UL 94
Thickness tested	0.81 mm	UL 94
UL recognition	yes	UL 94

## Electrical properties

Relative permittivity, 100Hz	5	IEC 62631-2-1
Relative permittivity, 1MHz	4.5	IEC 62631-2-1
Dissipation factor, 100Hz	300 E-4	IEC 62631-2-1
Dissipation factor, 1MHz	80 E-4	IEC 62631-2-1
Volume resistivity	1E12 Ohm.m	IEC 62631-3-1
Surface resistivity	1E14 Ohm	IEC 62631-3-2
Electric strength	40 kV/mm	IEC 60243-1
Comparative tracking index	PLC 0 PLC	UL 746A

## Other properties

Humidity absorption, 2mm	0.12 %	Sim. to ISO 62
Water absorption, 2mm	0.9 %	Sim. to ISO 62
Density	1590 kg/m³	ISO 1183
Density of melt	1370 kg/m³	Internal

## Injection

Drying Temperature	100 - 120 °C	
Drying Time, Dehumidified Dryer	3 - 4 h	
Processing Moisture Content	0.15 %	
Screw tangential speed	0.2 - 0.21 m/s	
Max. mould temperature	80 - 120 °C	
Back pressure	2 MPa	
Injection speed	slow	
Ejection temperature	140 °C	Internal

## Characteristics


Additives	Release agent
-----------	---------------

## Additional information

Injection molding	Standard injection moulding machines with three phase (15 to 25 D) plasticating screws will fit.
-------------------	--


# HOSTAFORM® C 9021 GV3/30

## Viscosity-shear rate

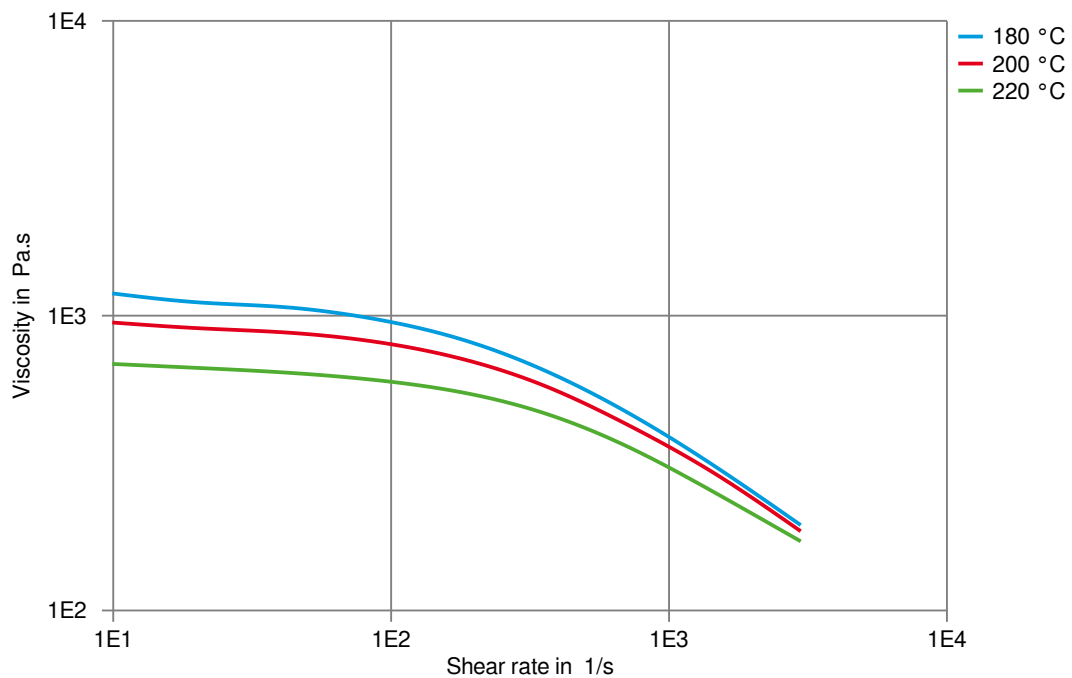


# HOSTAFORM® C 9021 GV3/30

## Shearstress-shear rate

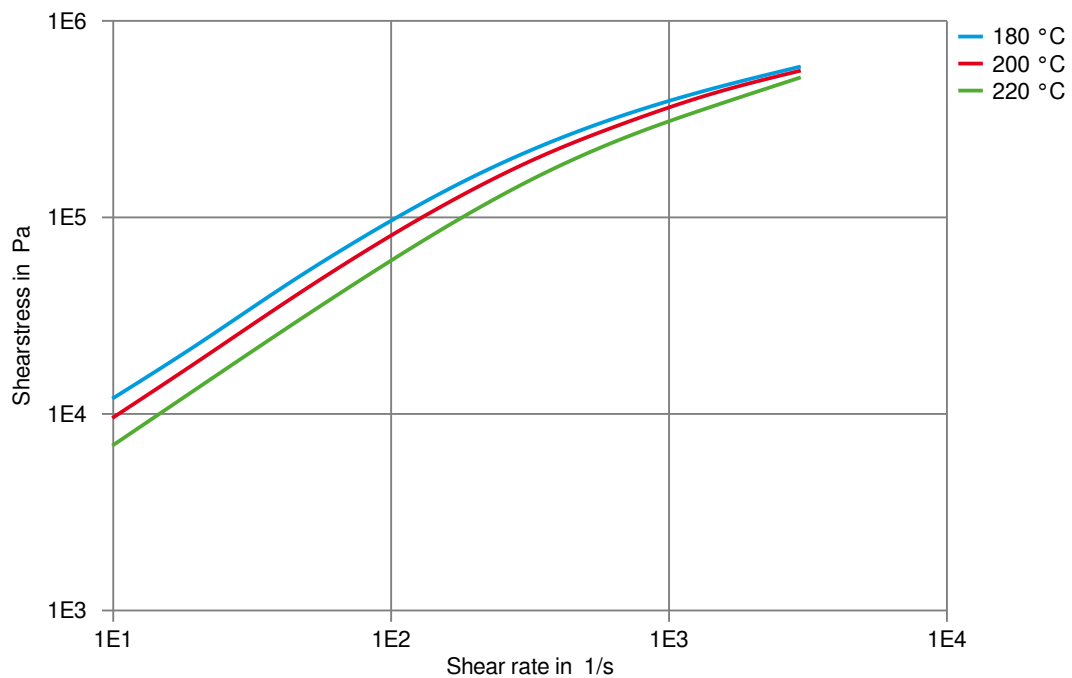


# HOSTAFORM® C 9021 GV3/30

## Stress-strain

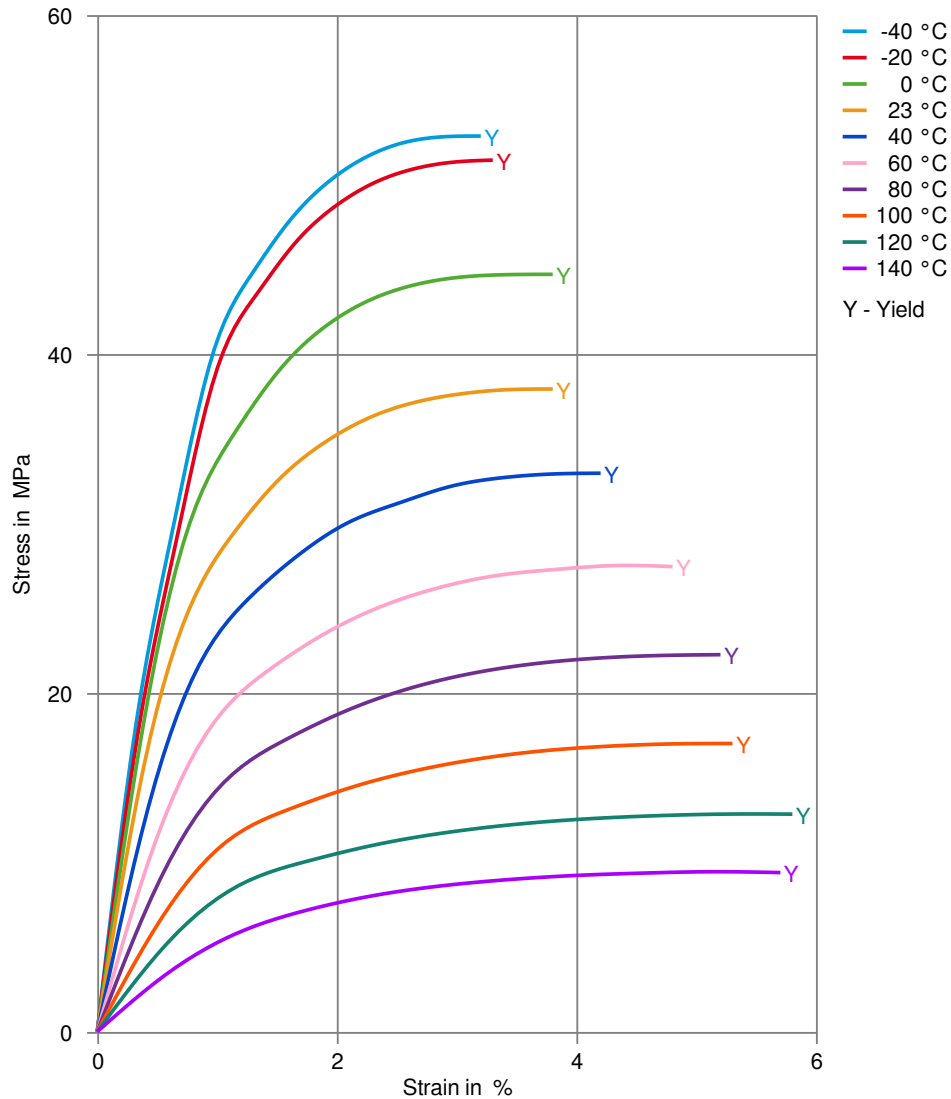

# HOSTAFORM® C 9021 GV3/30

## Secant modulus-strain

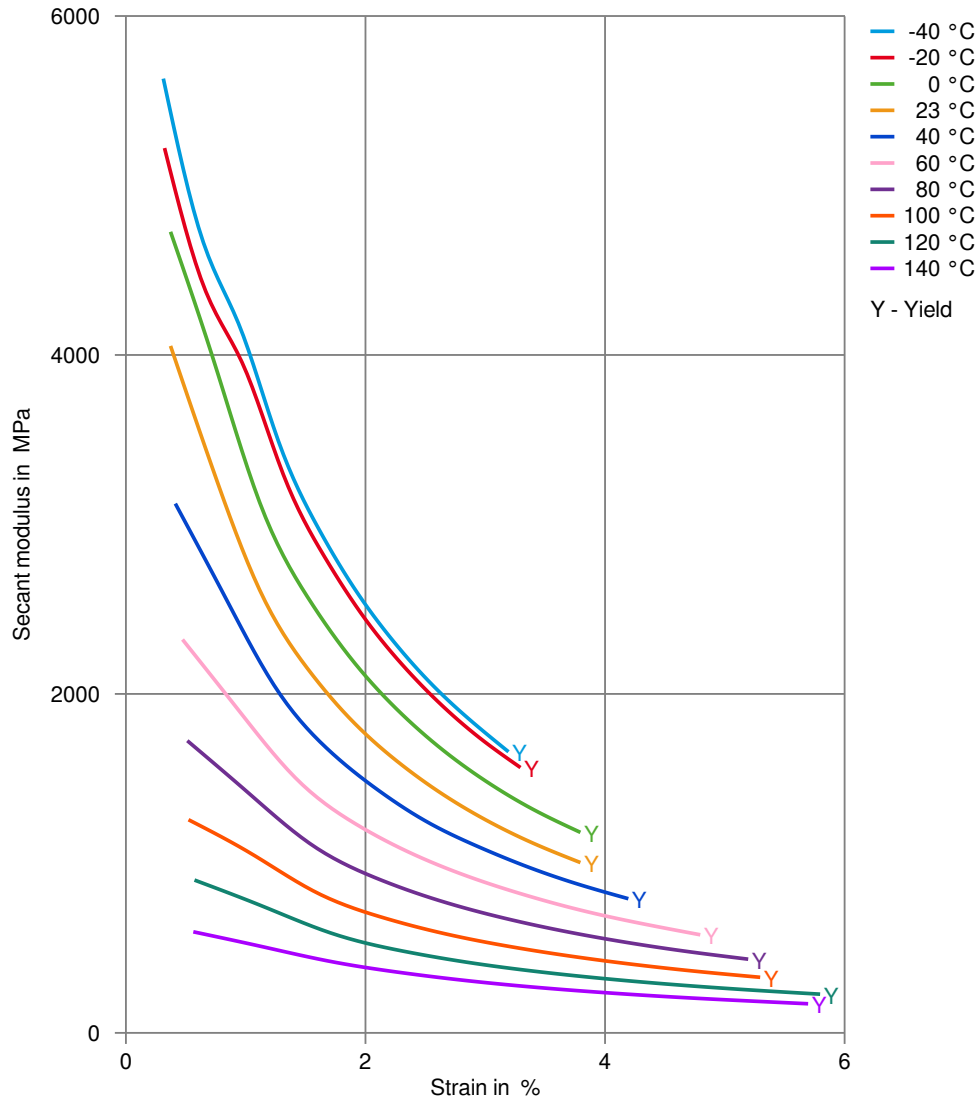

# HOSTAFORM® C 9021 GV3/30

## Processing Texts

Pre-drying	Drying is not normally required. If material has come in contact with moisture through improper storage or handling or through regrind use, drying may be necessary to prevent splay and odor problems.
Longer pre-drying times/storage	The product can then be stored in standard conditions until processed.
Injection molding	Standard injection moulding machines with three phase (15 to 25 D) plasticating screws will fit.
Injection molding Preprocessing	<p>General drying is not necessary due to low moisture absorption of the resin.</p> <p>In case of bad storage conditions (water contact or condensed water) the use of a recirculating air dryer (100 to 120 °C / max. 40 mm layer / 3 to 6 hours) is recommended.</p> <p>Max. Water content 0,2 %</p>
Injection molding Postprocessing	Conditioning e.g. moisturizing is not necessary.

## Other Approvals

Other Approvals	OEM	Specification	Additional Information
	BMW	GS 93016	
	Bosch	N28 BN22-X015	Natural
	Continental	TST N 055 54.16	