

#### UV resistance, low emission

Hostaform® acetal copolymer grade UV90Z XAP®2 is a UV stabilized material available in a range of colors generally for automotive interior applications. In addition, Hostaform® UV90Z XAP®2 has lower emissions as required for some automotive interiors. Low Emission Performance [VDA-275] <5 PPM

### Rheological properties

Melt volume-flow rate	8 cm <sup>3</sup> /10min	ISO 1133
Temperature	190 °C	
Load	2.16 kg	
Moulding shrinkage, parallel	2.0 %	ISO 294-4, 2577
Moulding shrinkage, normal	1.7 %	ISO 294-4, 2577

### Typical mechanical properties

Tensile Modulus	2650	MPa	ISO 527-1/-2
Yield stress, 50mm/min	64	MPa	ISO 527-1/-2
Yield strain, 50mm/min	9	%	ISO 527-1/-2
Charpy notched impact strength, 23°C	6	kJ/m <sup>2</sup>	ISO 179/1eA
Charpy notched impact strength, -30°C	5	kJ/m²	ISO 179/1eA
Hardness, Rockwell, M-scale	83		ISO 2039-2

## Thermal properties

Melting temperature, 10°C/min	167 °C	ISO 11357-1/-3
Temp. of deflection under load, 1.8 MPa	90 °C	ISO 75-1/-2
Temp. of deflection under load, 0.45 MPa	154 °C	ISO 75-1/-2
Coeff. of linear therm. expansion, parallel	90 E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal	110 E-6/K	ISO 11359-1/-2

### Other properties

Density	1400 kg/m <sup>3</sup>	ISO 1183
Deligity	1700 Na/111	100 1100

## Injection


Drying Temperature	100 - 120 °	,C
Drying Time, Dehumidified Dryer	3-4 h	l
Max. mould temperature	80 - 120 °	,C
Back pressure	4 N	ИРа
Injection speed	slow-medium	

Printed: 2023-08-07 Page: 1 of 4

Revised: 2023-07-10 Source: Celanese Materials Database




#### Stress-strain

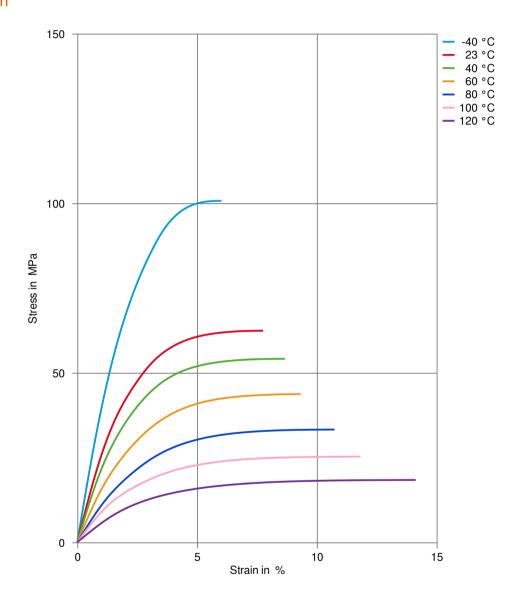

Printed: 2023-08-07 Page: 2 of 4



### Secant modulus-strain

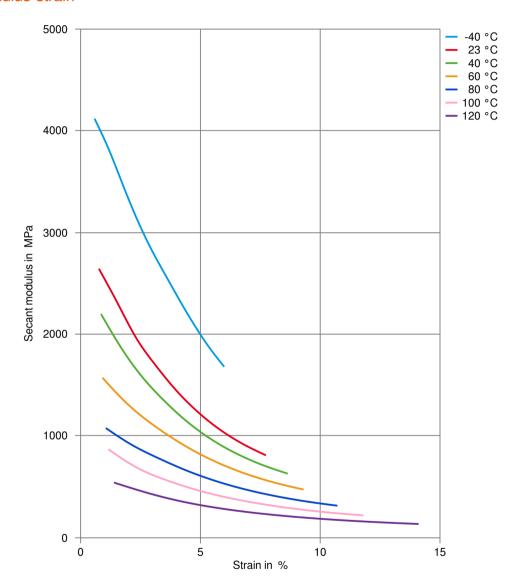

Printed: 2023-08-07 Page: 3 of 4

Revised: 2023-07-10 Source: Celanese Materials Database



### **Processing Texts**

Pre-drying

Drying is recommended to obtain optimum emission performance. If material contacts moisture through improper storage or handling, drying may be necessary to prevent splay and odor issues.

### Other Approvals

Other Approvals

OEM	Specification	Additional Information
Stellantis - Chrysler	CPN 1758	100% color match
Ford	WSS-M4D840-B1	
Geely	Q/JLY J7110235B	2018
GM	GMW16924P-POM-C2	
Li Auto	Q/LiA5310020	2021 (V2)
VW Group	TL 524 76	Natural

Printed: 2023-08-07 Page: 4 of 4

Revised: 2023-07-10 Source: Celanese Materials Database

NOTICE TO USERS: Values shown are based on testing of laboratory test specimens and represent data that fall within the standard range of properties for natural material. These values alone do not represent a sufficient basis for any part design and are not intended for use in establishing maximum, minimum, or ranges of values for specification purposes. Colourants or other additives may cause significant variations in data values. Properties of moulded parts can be influenced by a wide variety of factors including, but not limited to, material selection, additives, part design conditions and environmental exposure. Other than those products expressly identified as medical grade (including by MT® product designation or otherwise), Celanese's products are not intended for use in medical or dental implants. Regardless of any such product designation, any determination of the suitability of a particular material and part design for any use contemplated by the users and the manner of such use is the sole responsibility of the users, who must assure themselves that the material as subsequently processed meets the needs of their particular product or use. To the best of our knowledge, the information contained in this publication is accurate; however, we do not assume any liability whatsoever for the accuracy and completeness of such information. The information contained in this publication should not be construed as a promise or guarantee of specific properties of our products. It is the sole responsibility of the users to investigate whether any existing patents are infringed by the use of the materials mentioned in this publication. Moreover, there is a need to reduce human exposure to many materials to the lowest practical limits in view of possible adverse effects. To the extent that any hazards may have been mentioned in this publication, we neither suggest nor guarantee that such hazards are the only ones that exist. We recommend that persons intending to rely on any recommendation or to use any equipment, pr

© 2023 Celanese or its affiliates. All rights reserved. Celanese®, registered C-ball design and all other trademarks identified herein with ®, TM, SM, unless otherwise noted, are trademarks of Celanese or its affiliates. Fortron is a registered trademark of Fortron Industries LLC. KEPITAL is a registered trademark of Korea Engineering Plastics Company, Ltd.